

FES Liquid Mobil

Fire Extinguisher Emptying System

• Art.-No. 186725
FES Liquid attachment part with clear inspection container 9 litres and balancer for simple height adjustment of the inspection container.
The attachment part with the supplied fixture can be retrofitted to an existing turnable clamping device **DSV Mobil** and easily removed as required.

STRENGTHS AT A GLANCE

- FOAMLESS, ERGONOMIC, COMPLETE
- SERVICE WORK WITHOUT FIRE EXTINGUISHING AGENT LOSS AT MINIMAL FOAM DEVELOPMENT
- SIGNIFICANTLY IMPROVED ERGONOMIC WORKING

• FES Liquid Mobil. Upside down emptying a fire extinguisher (inspection container in the lower position).

• Art.-No. 186720
Fire Extinguisher Emptying System FES Liquid Mobil.



The fire extinguisher emptying system **FES Liquid Mobil** is a significant contribution to streamlining during the maintenance of water / foam fire extinguishers. It enables the convenient and above all rapid emptying and filling of cartridge pressured and stored pressure extinguishers with 6 to 9 litres wet


Individual components FES Liquid Mobil included

- | | | |
|---|-----------------|--|
| 1 | Art.-No. 186075 | Clamping bracket PA-Fix with locking screw |
| 2 | Art.-No. 186078 | Example of an emptying adapter, (various models, depending on make of fire extinguisher) |
| 3 | Art.-No. 186727 | Filling hose |
| 4 | Art.-No. 186726 | Holder for emptying adapter and filling hose with retainer |

fire extinguishing agents. The effort of handling fire extinguishers which have been removed from their brackets has been reduced to a minimum. Also, special emptying adapters guarantee a high working speed. The working period per maintenance procedure is significantly reduced. Time savings of approx. 50% are achieved.


Configuration

The **FES Liquid Mobil** consists of a mobile turnable clamping device **DSV Mobil** made of high-grade steel with clamping bracket PA-Fix, attachment **FES Liquid**, the holder for emptying adapters and filling hose, one emptying adapter and the filling hose.

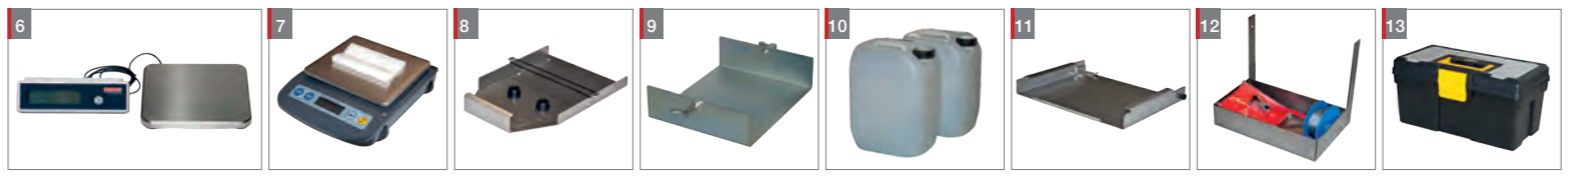


Further accessories (surcharge)

- | | | |
|----|-----------------|---|
| 5 | Art.-No. 186740 | MFP, capacity 11 L/min, weight 11 kg |
| 6 | Art.-No. 186903 | Floor scales 30 kg, Digit increment 10 g |
| 7 | Art.-No. 186910 | Scales Digi 5000 g, Digit increment 1 g |
| 8 | Art.-No. 187111 | Bracket for scales Digi 5000 |
| 9 | Art.-No. 186004 | Vehicle fixture for standing transport |
| 10 | Art.-No. 186074 | 2 units 10 L canister (per canister) |
| 11 | Art.-No. 186556 | Stainless steel holder for floor scales 30 kg |
| 12 | Art.-No. 186557 | Tool tray stainless steel |
| 13 | Art.-No. 187096 | Toolbox |

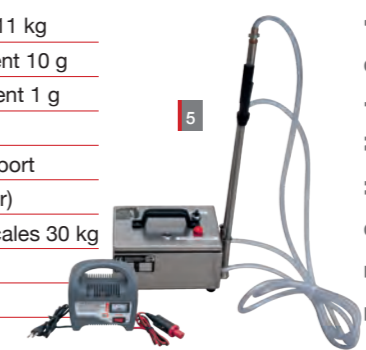

TECHNICAL DATA

FES Liquid Mobil
(EN ISO 12100-1, EN ISO 12100-2, EN 60204)

• Art.-No. 186720 
Emptying adapter (specify make of fire extinguisher)
Dimensions:
Height [mm]: approx. min. 1710, Height [mm]: max. 2200, Width [mm]: 730, Depth [mm]: 750. Weight [kg]: 48.
Transport wheels: Ø 200 mm, roller bearing mounted. High-grade steel model.

FES Liquid attachment part
(EN ISO 12100-1, EN ISO 12100-2, EN 60204)

• Art.-No. 186725 
Dimensions: Height [mm]: approx. min. 1445, Height [mm]: max. 1845, Width [mm]: 380, Depth [mm]: 215. Weight [kg]: 11.

Subject to technical modifications / 03-2020